

USAI® Lighting

Primary® NXT

Everything to Light a
Budget-Conscious Space



USAI PRODUCTS:
SliverLED® Primary® NXT and
Primary® NXT Cylinder

Primary® NXT

The **Primary NXT** product line is part of **USAI Lighting’s Tier 1** offering. This assortment of full family solutions allows specifiers to achieve USAI’s high-quality, white light and warm dimming options in a refined aesthetic for budget-conscious spaces, while maintaining a consistent below-the-ceiling roomside appearance.

SliverLED® Primary® NXT



Tier 1 \$ ○ ○ ○

APERTURE SIZE
1.75"

SOURCE LUMENS
1075-1575

UP TO **1050** DELIVERED LUMENS

TRIMMED AND FLUSHMOUNT

Downlight with 30° medium beam or 50° wide beam optics delivers 650 - 1050 lumens

Adjustable with 20° beam with 40° tilt and 362° rotation delivers 625 - 975 lumens

Wall Wash with dedicated round and square optics delivers 475 - 750 lumens

SliverLED® Primary® NXT meets California’s JA8 High Efficacy LED requirements for **Title 24**.

INPUT POWER
9W-15W

LED COLOR CHOICES

Classic White®

Dim-to-Warm

Dim-to-Warm+

BeveLED Mini® Primary® NXT



Tier 1 \$ ○ ○ ○

APERTURE SIZE
3"

SOURCE LUMENS
1075-1575

UP TO **1400** DELIVERED LUMENS

TRIMMED AND TRIMLESS

Downlight with 30° medium beam or 50° wide beam optics delivers 850 - 1400 lumens

Adjustable with 20° beam 40° tilt and 362° rotation delivers 875 - 1375 lumens

Wall Wash with dedicated round and square optics delivers 525 - 975 lumens

BeveLED Mini® Primary® NXT meets California’s JA8 High Efficacy LED requirements for **Title 24**.

INPUT POWER
9W-15W

LED COLOR CHOICES

Classic White®

Dim-to-Warm

Dim-to-Warm+

QUICK SHIP COMING SOON

BeveLED Mini® Retrofit Primary NXT



Tier 1 \$ ○ ○ ○

APERTURE SIZE
3"

SOURCE LUMENS
1075-1575

UP TO **1200** DELIVERED LUMENS

TRIMMED

Downlight with 26° medium beam or 48° flood beam optics delivers 825 - 1200 lumens

Wall Wash with dedicated round and square optics delivers 600 - 950 lumens


INPUT POWER
9W-15W

LED COLOR CHOICES

Classic White®

Dim-to-Warm

BeveLED® 2.2 Primary® NXT

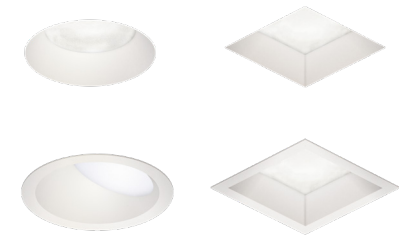

Tier 1 \$ ○ ○ ○
Tier 2 \$ \$ ○ ○

APERTURE SIZE
4.5"

SOURCE LUMENS
1150-2835

UP TO **2300** DELIVERED LUMENS

TRIMMED, TRIMLESS, MILLWORK KIT OPTION

Adjustable Downlight with 40° tilt and 362° rotation, and 20°, 25°, 40°, or 55° beam optics delivers 775 - 2300 lumens

Wall Wash with dedicated round and square optics delivers 675 - 1675 lumens

BeveLED 2.2 Primary® NXT meets California’s JA8 High Efficacy LED requirements for **Title 24**.

INPUT POWER
9W-29W

LED COLOR CHOICES

Classic White®

QUICK SHIP COMING SOON

Primary® NXT Cylinder

Tier 1 \$ ○ ○ ○

CYLINDER SIZE
3.5" DIAMETER x **10"** LENGTH

SOURCE LUMENS
1075-1575

UP TO **1375** DELIVERED LUMENS

Downlight with 30° medium beam, 50° wide beam or 65° flood beam optics delivers 750 - 1375 lumens


INPUT POWER
9W-15W

LED COLOR CHOICES

Classic White®

Dim-to-Warm

Dim-to-Warm+

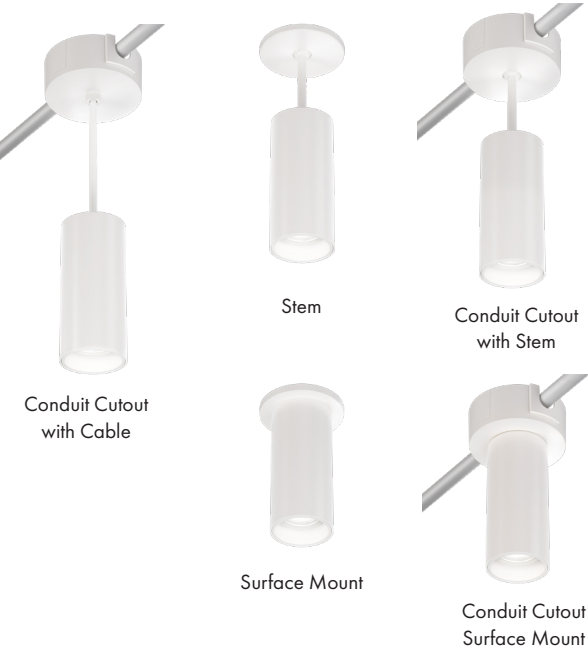

Primary[®] NXT

Tier 1 \$ ○ ○

Tier 2 \$ \$ ○

LED COLOR CHOICES

 Classic White[®]

 Dim-to-Warm

 Dim-to-Warm+

USAI PRODUCTS:
BeveLED Mini[®] Primary[®] NXT
and Primary NXT Cylinder

USAI[®]
Lighting

USAI LIGHTING COLLABORATORY
13 CROSBY STREET
NEW YORK, NY 10013
(845) 234-4090
SHOWROOM@USAILIGHTING.COM

USAI LIGHTING HEADQUARTERS
1126 RIVER ROAD
NEW WINDSOR, NY 12553
(845) 565-8500
INFO@USAILIGHTING.COM

©2024 USAI Lighting All Rights Reserved.
USAI, BeveLED, BeveLED Mini, SliverLED,
Primary, Classic White, are registered
trademarks of USAI, LLC. All designs protected
by copyright. Covered by US Patents.
Patents pending.
CA-086C